



Data sheet

TPE Circular Roof Outlet (Perforated Flange)




Function:	<p>TPE circular downpipe outlets designed to be bonded to bituminous waterproofing membranes around roof drainage downpipes. They have a perforated flange to improve the watertight bond. The outlet is bonded in the sandwich method where it is bonded between two layers of waterproofing membrane for an over-and-under seal. The slightly conical shape of the spigot enables fast and simple installation into drainpipes. It has two rings on the spigot to prevent water travelling upwards from the drainpipe. Always prime the outlet and membrane before installation.</p>		
Compatibility:	<p>They are compatible with APP and SBS prefabricated bituminous felts and bituminous coats.</p>		
Range:	<p>DN 40 - DN 60 - DN 75 - DN 80 - DN 90 - DN 100 - DN 110 - DN 125 - DN 140 - DN 150 - DN 160 - DN 200 DN 125 for HDPE pipe</p>		
Performance:	<p>Resistant to deterioration by the sun, ozone and other agents or chemicals normally found in the atmosphere. They have excellent flexibility even at low temperatures. The mechanical properties are maintained in the long term.</p>		
Operating temperature:	-20°C; +70°C	Included accessories:	N/A
Recycled product:	No	Recyclable:	Yes
Material:	TPE	Optional accessories:	<p>Universal leaf excluders Gravel excluders Rigid extension shank Flexible heating element</p>

If not otherwise indicated, all measurements are expressed in millimetres.

Data sheet

TPE Circular Roof Outlet (Perforated Flange)

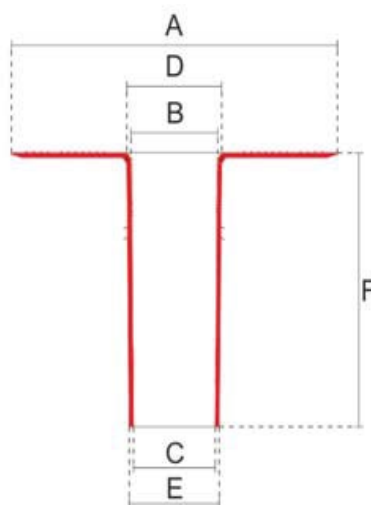

Item	Description	A	B	C	D	E	F
RO-TPE-030-050-240-040-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D40mm	235	26	24	33	29	243
RO-TPE-030-050-240-060-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D60mm	235	48	43	53	48	243
RO-TPE-030-050-240-075-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D75mm	320	65	61	70	66	243
RO-TPE-030-050-240-080-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D80mm	320	69	64	74	69	243
RO-TPE-030-050-240-090-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D90mm	320	77	73	82	78	243
RO-TPE-030-050-240-100-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D100mm	320	89	84	94	89	243
RO-TPE-030-050-240-110-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D110mm	320	91	87	97	92	243
RO-TPE-030-050-240-125-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D125mm	320	114	109	119	114	243
RO-TPE-030-050-240-140-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D140mm	380	127	122	132	127	243
RO-TPE-030-050-240-150-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D150mm	380	136	131	141	136	243
RO-TPE-030-050-240-160-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D160mm	380	146	141	151	146	243
RO-TPE-030-050-240-200-Z	TPE Circular Roof Outlet (perforated flange) H240mm-D200mm	440	185	180	190	185	243
RO-TPE-030-051-240-125-Z	TPE Circular Roof Outlet (perf. flange) for HDPE H240-D125mm	320	111	106	116	111	243

Additional Information:

For more information on interface with connectors etc. please refer to the corresponding Accessories datasheets.

