


Maximum reliability. Minimum fuss.



Technical Data Sheet

EdgeGuard Premium

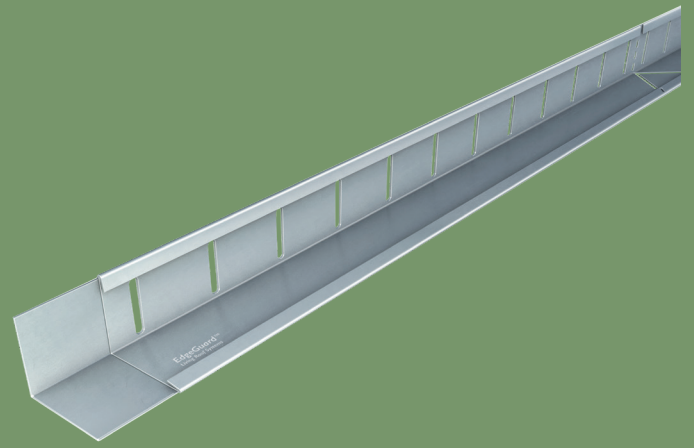

Living Roof Systems

Application

- + Designed for use in variety of green or ballasted roof applications
- + Can be used either as an edge restraint, or where a solution for retaining or separating the roof garden materials is required.

Key Features

- + Supplied in 2.4 M lengths - quick installation
- + Lightweight and robust
- + Can be cut to length
- + Available powder coated in any colour
- + Connectors not normally required
- + Manufactured from aluminium - long lasting and aesthetically pleasing

Technical Data

Code	Description	Height (mm)	Width of base (mm)	Material thickness (mm)	Length of section (mm)
EG-A-P-50/2400	Aluminium, pre-punched and profiled	50	100	1.2	2400
EG-A-P-75/2400		75	100	1.2	
EG-A-P-100/2400		100	100	1.2	
EG-A-P-120/2400		120	100	1.2	
EG-A-P-150/2400		150	150	1.2	
EG-A-P-200/2400		200	150	1.5	
EG-A-P-250/2400		250	200	1.5	
EG-A-P-300/2400		300	200	1.5	



Merlin House
Seven Mile Lane
Borough Green
Sevenoaks
Kent
TN15 8QY

Enquiries

0800 304 7616

International

+44 (0) 1732 882387

Fax

0845 450 7486

Email

info@fixfast.com



Certificate number 10905
ISO 9001, ISO 14001
ISO 45001