

Technical DatasheetPolypropylene Edge Plate




FUNCTION	The Polypropylene Edge Plate is designed to prevent direct contact between paving slabs or tiles and perimeter elements such as walls, upstands, or parapets. Its curved front edge acts as a buffer, helping to protect adjacent surfaces from impact damage while maintaining a consistent drainage gap. The plate's shape allows for minor movement in the paving surface, reducing stress on the tiles. A central slit enables it to sit securely over the lugs or fins of pedestal headpieces or support pads, ensuring stable positioning without mechanical fixings.					
COMPATABILITY	Compatible with all Wallbarn's Polypropylene range of pedestals (with 2mm & 4mm Lugs on headpiece)					
RECYCLED	No					
RECYCLABLE	Yes					
MATERIAL	Manufactured from high quality polypropylene and are suitable for outdoor laying in normal atmospheric conditions with all technical, physical and mechanical properties maintained in the long-term.					
THICKNESS	The plates are 2mm thick each and this needs to be added to the overall height when planning use of them.					

Wallbarn Ltd Unit 16 Capital Business Centre 22 Carlton Road, South Croydon. CR2 0BS IMS.T.1098.v1

Phone: 0208 916 2222 Email: sales@wallbarn.com Website: www.wallbarn.com



Technical Datasheet

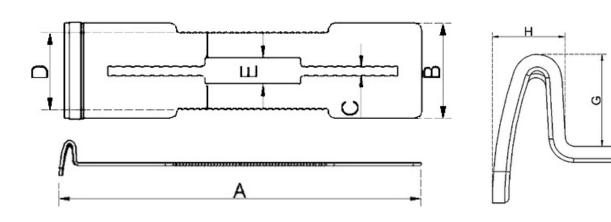

Item	Descriptio n	A	В	С	D	Е	F	G	Н
SP-EDGE-P- PLATE-Z	Polypropyl ene Edge Plate for Paving	185mm	50mm	4.2mm	39.8mm	14.2mm	2mm	11.4mm	8.9mm





Wallbarn Ltd Unit 16 Capital Business Centre 22 Carlton Road, South Croydon. CR2 0BS IMS.T.1098.v1